

FURANE PRODUCTS

electronic materials

Furane Products Company a CIBA-GEIGY Company 5121 San Fernando Road West Los Angeles, CA 90039

> Tel 818 247 6210 TWX 910 497 2060 FAX 818 507 0167

Date: June 30, 1989

© EPA-OTS 000622667T

Document Processing Center Office of Toxic Substance, TS-790 U.S. Environmental Protection Agency 401 M Street, SW Washington, DC 20460

90.890000 431

Reference: CAIR Report as Processor of Toluene diisocyanate

Dear Sir or Madam:

Ciba-Geigy Corporation/Furane Products herewith submits the enclosed CAIR Reporting Form in compliance with the above reference rule.

Ciba-Geigy Corporation/Furane Products is a processor of Toluene diisocyanate (CAS # 26471-62-5) which is purchased under the trade name, Mondur TD-80.

If you have any question regarding this report, please contact me at (818) 247-6210 ext. 104.

Sincerely,

Ciba-Geigy Corp/Furane Products

Royans Patel

Rajesh S. Patel S.H.& E. Chemist

enc: CAIR Report certified mail return receipt requested

		SECTION 1 GENERAL MANUFACTURER, IMPORTER, AND PROCESSOR INFORMATION
PART	A	GENERAL REPORTING INFORMATION
1.01	Tł	is Comprehensive Assessment Information Rule (CAIR) Reporting Form has been
<u>CBI</u>	co	empleted in response to the <u>Federal Register Notice of $[1]2[2]2[2]3[8]8$</u>
[_]	a.	If a Chemical Abstracts Service Number (CAS No.) is provided in the Federal
		Register, list the CAS No $[\underline{}]\underline{2}]\underline{6}]\underline{4}]\underline{7}]\underline{1}]-[\underline{6}]\underline{2}]-[\underline{5}]$
	b.	If a chemical substance CAS No. is not provided in the <u>Federal Register</u> , list either (i) the chemical name, (ii) the mixture name, or (iii) the trade name of the chemical substance as provided in the <u>Federal Register</u> .
		(i) Chemical name as listed in the rule N/A
		(ii) Name of mixture as listed in the rule
		(iii) Trade name as listed in the rule
	c.	If a chemical category is provided in the <u>Federal Register</u> , report the name of the category as listed in the rule, the chemical substance CAS No. you are reporting on which falls under the listed category, and the chemical name of the substance you are reporting on which falls under the listed category.
		Name of category as listed in the rule N/A
		CAS No. of chemical substance [_]_]_]_]_]_]_]_]_]_[]_]
		Name of chemical substance
1.02	Id	entify your reporting status under CAIR by circling the appropriate response(s).
CBI	Ma	nufacturer 1
[_]	Im	porter 2
	Pr	ocessor3
	X /	P manufacturer reporting for customer who is a processor
	X/	P processor reporting for customer who is a processor 5
<u>_</u>]	Marl	(X) this box if you attach a continuation sheet.

1.03	in the above-listed Federal Register Notice?												
<u>CBI</u>	Yes	5	• • • • • • • •	• • • • • • • •	• • • • • • •	•••••	•••••	•••••	[<u>x</u> 1	Go to q	question 1.04	į
1	No	• • • • •	••••••	•••••	•••••	* * * * * * * *	• • • • • •	•••••	[Go to q	uestion 1.05	;
1.04 <u>CBI</u> [_]	a.	Circl Yes .	r a trade le the ap	name(s) propriate	diff <u>e</u> r e respo 	ent than nse.	that 1:	isted in	the <u>F</u>	edera	l Regis	ibute it ter Notice?	
`		No	• • • • • • • • •	• • • • • • • •	• • • • • • •	• • • • • • •	• • • • • • •	• • • • • • •	• • • • •	• • • • •	• • • • • •	2)
	b.	Check	the app	ropriate	box be	low:	N/A						
		[_]	You hav	e chosen	to not:	ify your	custome	ers of th	heir r	eport	ing obl	igations	
			Provide	the trad	de name	(s)			···				
									-	, <u>-</u> 84			
		[_]	You hav	chosen	to repo	ort for y	our cus	tomers					
		[_]	You have date of reporting	e submitt the rule	ted the	trade na Federal	me(s) t Regist	o EPA or er Notic	ne day se unde	afte er.wh	r the e	ffective are	
1.05 CBI	If y	ou buy	y a trade require	name pr	oduct a	and are reade name	eportin suppli	g becaus er, prov	se you ride th	were	notifie ade nam	ed of your	
=== [<u> </u>	Trac	le name	e	• • • • • • • • • •	<u>Mo</u>	ndur TD-	80	77714					
ı,	Is t	the tra	ade name	product	a mixtu	re? Cir	cle the	appropr	iate r	espor	ıse.		
	Yes	• • • • •	• • • • • • • •	• • • • • • • •	• • • • • • •	• • • • • • • •		• • • • • • • •		• • • • •		(1))
	No .	•••••	• • • • • • • •	•••••	•••••	•••••	• • • • • •	• • • • • • • •	• • • • • •	••••	• • • • • •	2	•
l.06	Cert sign	ificat	tion T certifica	he person tion sta	n who i tement	s respon: below:	sible fo	or the c	omplet	ion o	f this	form must	
	"I h ente	ereby red on	certify this fo	that, to rm is cor	the be	st of my and accum	knowled	ige and	belief	, all	inform	ation	
	F	Rajesh	S. Patel			Ra	أعهر ع	S Pata GNATURE	١			30-89	
			NAME				SI				DAT	E SIGNED	
	S	. Η. δ	E. Chem TITLE	ist		(_818)		PHONE NO					
	ark	(X) th	is box i	you att	tach a d	continuat	ion she	et.					

1.07 <u>CBI</u> [_]	Exemptions From Reporting If you have provided EPA or another Federal agency with the required information on a CAIR Reporting Form for the listed substance within the past 3 years, and this information is current, accurate, and complete for the time period specified in the rule, then sign the certification below. You are required to complete section 1 of this CAIR form and provide any information now required but not previously submitted. Provide a copy of any previous submissions along with your Section 1 submission.								
	"I hereby certify that, to the information which I have not to EPA within the past 3 years period specified in the rule."	ncluded is	nn f	his CAIR Reporting Ro	rm had boon sub-ite-1				
	NOT APPLICABLE								
	NAME			SIGNATURE	DATE SIGNED				
	TITLE	_ () .	TELEPHONE NO.	DATE OF PREVIOUS SUBMISSION				
-	•								
1.08 <u>CBI</u> []	CBI Certification If you ha certify that the following sta those confidentiality claims w "My company has taken measures and it will continue to take theen, reasonably ascertainable using legitimate means (other a judicial or quasi-judicial prinformation is not publicly availed to the continue to t	tements hich you to prot hese mea by othe than dis roceedin ailable	truth have ect t sures r per cover g) wi elsew	the confidentiality of the confidentiality of the information is sons (other than gove y based on a showing thout my company's confidential the confidential than the confidenti	f the information, not, and has not ernment bodies) by of special need in onsent; the of the information on."				
	TITLE	_ ()	TELEPHONE NO.	DATE SIGNED				

PART	B CORPORATE DATA
1.09	Facility Identification
<u>CBI</u>	Name $[C]IBAJ-JGEIIGIYI/FJURIAINJEJ-JPRJOJDJUCITISI$
[_]	Address [5]1]2]1]3]A]N]]F]E]R]N]A]N]D]0]]R]D]]W]E]S]T]
	(L]OS] ANGELLES City
	$\begin{bmatrix} \overline{C} \\ \overline{D} \\ \overline{D} \end{bmatrix} = \begin{bmatrix} \overline$
	Dun & Bradstreet Number $[\underline{\overline{U}}]\underline{\overline{N}}]-[\underline{\overline{K}}]\underline{\overline{N}}]\underline{\overline{O}}-[\underline{\overline{W}}]\underline{\overline{N}}]\underline{\overline{D}}]$
	EPA ID Number
	Employer ID Number
	Primary Standard Industrial Classification (SIC) Code $\dots [2]8]2]1$
	Other SIC Code
	Other SIC Code
1.10	Company Headquarters Identification
<u>CBI</u>	Name [C] I B A - G E I G Y C O R P O R A T I O N C O N O N O N O N O N O N O N O N O N O
[_]	Address [4]4]4]]S]A] W]] M] I] L] L] R] I] V] E R] D] A] D]]] Street
	$[\underline{A}]\underline{R}]\underline{D}]\underline{S}]\underline{L}]\underline{E}]\underline{Y}]_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]]]]]$
	Dun & Bradstreet Number $\dots [\overline{0}]\overline{0}]-[\overline{1}]\overline{2}]\overline{2}]-[\overline{1}]\overline{8}]\overline{4}]\overline{5}]$
	Employer ID Number
	Mark (X) this box if you attach a continuation sheet.
	200 12 you actaon a continuation sheet.

1.11	Parent Company Identification
<u>CBI</u>	Name [C]
	[A]R]D]S]L]E]Y]_]_]_]_]_]_]_]_]_]_]_]_]_]
	$\begin{bmatrix} \overline{N} \end{bmatrix} \overline{Y} $ $\begin{bmatrix} \overline{1} \end{bmatrix} \overline{0} \overline{1} \overline{5} \overline{1} \overline{0} \overline{1} \overline{2} \overline{1} - \overline{2} \overline{1} \overline{6} \overline{1} \overline{9} \overline{1} \overline{9} \overline{1}$ State
	Dun & Bradstreet Number $[0]$ $[0]$ $[0]$ $[1]$ $[2]$ $[2]$ $[3]$ $[4]$ $[5]$
1.12	Technical Contact
<u>CBI</u>	Name $[R]AJJEJSJHJJSJJPJAJTJEJLJJJJJJJJJJJJJJJJJJJJJJJJJJJJJJJJ$
[_]	Title $[S]$ $[H]$ $[E]$ $[E]$ $[C]$ $[E]$ $[M]$ $[S]$ $[T]$ $[D]$ $[D]$ $[D]$ $[D]$ $[D]$ $[D]$
	Address $[5]1]2]1]3]A]N]]F]E]R]N]A]N]D]O]]R]D]JW]E]S]T] Street$
	[L]O]S]]]A]N]G]E]L]E]S]]]]]]]]]]]]]]]]]]]]]]]]]]]]
	$\begin{bmatrix} \overline{C} \\ \overline{A} \end{bmatrix} \qquad \begin{bmatrix} \overline{9} \\ \overline{0} \end{bmatrix} \overline{0}] \overline{0}] \overline{3}] \overline{9}] - \begin{bmatrix} \overline{1} \\ \overline{0} \end{bmatrix} \overline{1}] \overline{1}$ State
	Telephone Number $[8]1]8]-[2]4]7]-[6]2]1]0]$
1.13	This reporting year is from $[\overline{0}]\overline{1}$ $[\overline{8}]\overline{8}$ to $[\overline{1}]\overline{2}$ $[\overline{8}]\overline{8}$ Mo. $[\overline{8}]\overline{8}$
[] !	Mark (X) this box if you attach a continuation sheet.

1.14	Facility Acquired provide the follo	l If you purchased this facility during the reporting year, owing information about the seller:
<u>CBI</u>	Name of Seller []	NOT APPLICIABLE DI
[_]	Mailing Address	[_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]
	•	[_1_1_1_1_1_1_1_1_1_1_1_1_1_1_1_1_1_1_1
		[_]_] [_]_]_]_]_][_]_]_]_] State
	Employer ID Numbe	r[_]_]_]_]_]_]
	Date of Sale	
	Contact Person [_	
	Telephone Number	[_]_]-[_]_]-[_]_]-[_]_]-[_]]]
1.15	Facility Sold following informa	If you sold this facility during the reporting year, provide the tion about the buyer:
<u>CBI</u>	Name of Buyer $[\underline{\overline{N}}]$	IOT APPLIES ABLES IN THE
[_]	Mailing Address	[_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]
		[_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]_]
		[_]_] [_]_]_]_]_][_]_]_] State
	Employer ID Number	· · · · · · · · · · · · · · · · · · ·
	Date of Purchase	
	Contact Person [
	Telephone Number .	[_]_]-[_]_]-[_]_]-[_]_]
[_] 1	Mark (X) this box i	f you attach a continuation sheet.

	Classification	Quantity
Ţ		
	Manufactured	
	Imported	
	Processed (include quantity repackaged)	1657
	Of that quantity manufactured or imported, report that quantity:	
	In storage at the beginning of the reporting year	, <u>NA</u>
	For on-site use or processing	NA NA
	For direct commercial distribution (including export)	NA NA
	In storage at the end of the reporting year	NA
	Of that quantity processed, report that quantity:	
	In storage at the beginning of the reporting year	1156
	Processed as a reactant (chemical producer)	1657
	Processed as a formulation component (mixture producer)	NA
	Processed as an article component (article producer)	NA
	Repackaged (including export)	NA
	In storage at the end of the reporting year	507

chemical	Mixture If the listed substance on which you are required to report is a mixture or a component of a mixture, provide the following information for each component chemical. (If the mixture composition is variable, report an average percentage of each component chemical for all formulations.)								
]	Component Name	Supplie Name	er	Composition (specify	rage % on by Weigh precision, 45% ± 0.5%)				
NOT A	PPLICABLE	NOT APPLIC	CABLE						
·									
				-					
	-								
				-					
				Total	100%				
				·					

2.0	4 State the quantity of the listed substance that your facility ma or processed during the 3 corporate fiscal years preceding the r descending order.	nufactured, in eporting year	mported, in
<u>CBI</u>			
[Year ending	$[\underline{1}]\underline{2}$ Mo.	[<u>8</u>] <u>7</u>] Year
	Quantity manufactured	NA	kg
	Quantity imported	NA	kg
	Quantity processed		
	Year ending	$[\underline{1}]\underline{2}$	[<u>8</u>] <u>6</u>] Year
	Quantity manufactured	NA	kg
	Quantity imported	NA.	kg
	Quantity processed		
	Year ending		[<u>8</u>] <u>5</u>] Year
	Quantity manufactured	NA	kg
	Quantity imported	NA	kg
	Quantity processed	3261	kg
2.05 CBI	Specify the manner in which you manufactured the listed substance appropriate process types.	. Circle all	
[_]	Continuous process		1
	Semicontinuous process	• • • • • • • • • • • • • • • • • • • •	2
	Batch processNOT APPLICABLE	•••••	3
	Mark (X) this box if you attach a continuation sheet.		

2.06 CBI	Specify the manner in appropriate process ty	which you processed	the listed substance.	Circle all
[_]	Continuous process	•••••	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
	Semicontinuous process			
	Batch process			
2.07 CBI	State your facility's substance. (If you ar question.)	name-plate capacity f e a batch manufacture	or manufacturing or per or batch processor,	rocessing the listed do not answer this
[_]	Manufacturing capacity	••••••	••••••	NA kg/yr
	Processing capacity .		_	
2.08 CBI	If you intend to increamanufactured, imported year, estimate the increavolume.	 or processed at any 	time after your curr	ent corporate figa-1
[_]		Manufacturing Quantity (kg)	Importing Quantity (kg)	Processing Quantity (kg)
	Amount of increase	NA	NA	1633
	Amount of decrease	NA	NA NA	NA
	Mark (X) this box if you	ı attach a continuati	on sheet.	

2.09	substance during	largest volume manufacturing or processing proces, specify the number of days you manufactured ag the reporting year. Also specify the averages type was operated. (If only one or two operated)	or processed	the listed
<u>CBI</u>		•		
[_]			_Days/Year	Average Hours/Day
	Process Type #1	(The process type involving the largest quantity of the listed substance.)		
		Manufactured	NA	NA
		Processed	14	8
	Process Type #2	(The process type involving the 2nd largest quantity of the listed substance.)		
		Manufactured	NA	NA
		Processed	NA	NA
	Process Type #3	(The process type involving the 3rd largest quantity of the listed substance.)		
		Manufactured	NA	NA
		Processed	NA	NA
2.10 CBI	Maximum daily in Average monthly	inventory	of the list the form of	kg kg
<u>_</u>]	Mark (X) this bo	k if you attach a continuation sheet.		7 10

(<u> </u>	introduced in etc.).	to the product (e.g.,	carryover from raw	material, reacti	
	CAS No.	Chemical Name	Byproduct, Coproduct or Impurity ¹	Concentration (%) (specify ± % precision)	Source of By products, Co products, or Impurities
	UNKNOWN	UNKNOWN			
					
					
		•			
	¹ Use the follo	wing codes to designat	te byproduct conro	duat ar impuritu	·
	B = Byproduct C = Coproduct I = Impurity		te byproduct, copro	udet, or impurity	/ :

2.12 <u>CBI</u> [_]	Existing Product Types List all imported, or processed using the l the quantity of listed substance y total volume of listed substance u quantity of listed substance used listed under column b., and the tythe instructions for further explana	isted sub ou use fo sed durin captively pes of en	stance during the reach product of the reporting on-site as a pod-users for each	he reporting ye type as a perce year. Also li ercentage of th	ear. List entage of th ist the ne value
	a. b. % of Qua Manufac Importe Product Types Proces	tured, ed, or	c. % of Quantit Used Captive On-Site	ty ely	d. E End-Users ²
	K100%		NA		I
	•				
	¹ Use the following codes to design				
	<pre>1 Use the following codes to designa A = Solvent B = Synthetic reactant C = Catalyst/Initiator/Accelerator Sensitizer D = Inhibitor/Stabilizer/Scavenger Antioxidant E = Analytical reagent F = Chelator/Coagulant/Sequestrant G = Cleanser/Detergent/Degreaser H = Lubricant/Friction modifier/An agent I = Surfactant/Emulsifier J = Flame retardant K = Coating/Binder/Adhesive and ad 2 Use the following codes to designa</pre>	I M M M M M M M M M M M M M	L = Moldable/Cas M = Plasticizer N = Dye/Pigment/ D = Photographic and additive P = Electrodepos D = Fuel and fue R = Explosive ch E = Fragrance/Fl T = Pollution co U = Functional f M = Metal alloy M = Rheological E = Other (speci	Colorant/Ink a /Reprographic s ition/Plating l additives emicals and add avor chemicals ntrol chemicals luids and addi and additives modifier fy)	nd additive chemical chemicals ditives
		= Consum			
[_]	Mark (X) this box if you attach a co	ontinuati	on sheet.		

2.13 <u>CBI</u> [_]	Expected Product Types import, or process using corporate fiscal year. import, or process for substance used during used captively on-site types of end-users for explanation and an example.	ng the listed subst For each use, spe each use as a perc the reporting year. as a percentage of each product type.	ance cify entag Als the	at any time after the quantity you ge of the total vo so list the quanti value listed unde	your current expect to manufacture, lume of listed ty of listed substance
	a.	b.		c.	d.
	Product Types ¹ K	% of Quantity Manufactured, Imported, or Processed	_	% of Quantity Used Captively On-Site	Type of End-Users ²
	•				
	<pre>1 Use the following code: A = Solvent B = Synthetic reactant C = Catalyst/Initiator: Sensitizer D = Inhibitor/Stabilize: Antioxidant E = Analytical reagent F = Chelator/Coagulant: G = Cleanser/Detergent: H = Lubricant/Friction agent I = Surfactant/Emulsifit J = Flame retardant K = Coating/Binder/Adhe 2 Use the following codes I = Industrial CM = Commercial</pre>	/Accelerator/ er/Scavenger/ /Sequestrant /Degreaser modifier/Antiwear der esive and additives to designate the CS = Cons	L .= M = N = O = P = Q = R = U = V = X = type	Moldable/Castable Plasticizer Dye/Pigment/Color Photographic/Repr and additives Electrodeposition Fuel and fuel add Explosive chemica Fragrance/Flavor Pollution control Functional fluids Metal alloy and a Rheological modif Other (specify)	ls and additives chemicals chemicals and additives dditives ier
<u></u>	Mark (X) this box if you	attach a continua	tion	sheet.	

2.15 CBI	Circ lis	cle all applicable modes of transportation used to deliver bulk shipmented substance to off-site customers.	its of the						
[_]	True	ckNOT APPLICABLE	1						
		lcar	_						
		ge, Vessel							
	Pineline								
		ne							
			_						
	othe	er (specify)	6						
2.16 <u>CBI</u>	or p	tomer Use Estimate the quantity of the listed substance used by your prepared by your customers during the reporting year for use under each end use listed (i-iv). egory of End Use	customers						
	i.	Industrial Products							
		Chemical or mixtureNOT APPLICABLE	lea (111						
		Article							
	ii.	Commercial Products	kg/yr						
		Chemical or mixtureNOT APPLICABLE							
	iii.	Article	kg/yr						
	111.	Consumer Products NOT APPLICABLE							
		Chemical or mixtureNOT APPLICABLE	kg/yr						
		Article	kg/yr						
	iv.	<u>Other</u>							
		Distribution (excluding export) .NOT APPLICABLE							
		Export	kg/yr						
		Quantity of substance consumed as reactant	kg/yr						
		Unknown customer uses							
_ ₁	Mark	(X) this box if you attach a continuation sheet.	Manua						
- '		the solution accommission sneet.							

SECTION 3 PROCESSOR RAW MATERIAL IDENTIFICATION

PART	A GENERAL DATA							
3.01 <u>CBI</u>	Specify the quantity purchased and the average price paid for the listed substance for each major source of supply listed. Product trades are treated as purchases. The average price is the market value of the product that was traded for the listed substance.							
·	Source of Supply	Quantity (kg)	Average Pric (\$/kg)					
	The listed substance was manufactured on-site.	NA	NA					
	The listed substance was transferred from a different company site.	NA NA	NA					
	The listed substance was purchased directly from a manufacturer or importer.	NA	NA					
	The listed substance was purchased from a distributor or repackager.	998	\$3,00/Kg					
	The listed substance was purchased from a mixture producer.	NA NA	NA.					
3.02 CBI []	Circle all applicable modes of transportation used to your facility. Truck	••••••	(1					
	Railcar	••••••	2					
	Barge, Vessel	••••••	3					
	Pipeline	••••••	4					
	Plane	• • • • • • • • • • • • • • •	5					
	Other (specify)	• • • • • • • • • • • • • • • • • • • •	6					
1	Mark (X) this box if you attach a continuation sheet.							

3.03 a. CBI	Circle all applicable containers used to transport the listed subsfacility.	tance to y	our
[_]	Bags		. 1
	Boxes		
	Free standing tank cylinders		
	Tank rail cars		_
	Hopper cars		
	Tank trucks		-
	Hopper trucks		
	Drums		
	Pipeline		
	Other (specify)		
b.	If the listed substance is transported in pressurized tank cylinder cars, or tank trucks, state the pressure of the tanks.		
	Tank cylinders	N/A	mmHg
	Tank rail cars	N/A	mmHg
	Tank trucks	N/A	mmHg
			J
	(X) this box if you attach a continuation sheet.	7/20/	

or the mixture, the na	me of its supplier(s) ition by weight of th	form of a mixture, list the or manufacturer(s), an est see listed substance in the morting year.	imate of the
Trade Name	Supplier or Manufacturer	Average % Composition by Weight (specify <u>+</u> % precision)	Amount Processed (kg/yr)
NOT APPLICABLE	NOT APPLICABLE	· · · · · · · · · · · · · · · · · · ·	
	-	-	
•			
	·		
		•	

I reporting year in the fo	e listed substance used as a r rm of a class I chemical, clas by weight, of the listed subs	ss II chemical, or polymer, and
	Quantity Used (kg/yr)	% Composition by Weight of Listed Sub- stance in Raw Material (specify <u>+</u> % precision
Class I chemical	1657	100
	N/A	N/A
	N/A	N/A
Class II chemical	N/A	N/A
•	N/A	N/A
	N/A	N/A
Polymer	N/A	N/A
	N/A	N/A
	N/A	N/A

SECTION	/.	PHYSTCAL/CHEMTCAL	DDODEDTTEC
SECTION	4	EDISTORY/CURMICAL	PRUPERTIES

ር	en	۱۵	ra '	1 1	'n	c t	rı	10	+ -	'n	

If you are reporting on a mixture as defined in the glossary, reply to questions in Section 4 that are inappropriate to mixtures by stating "NA -- mixture."

For questions 4.06-4.15, if you possess any hazard warning statement, label, MSDS, or other notice that addresses the information requested, you may submit a copy or reasonable facsimile in lieu of answering those questions which it addresses.

- AMI	A PHYSICAL/CHEMICAL DA	TA SUMMARY						
4.01 <u>CBI</u>	Specify the percent purity for the three major technical grade(s) of the listed substance as it is manufactured, imported, or processed. Measure the purity of the substance in the final product form for manufacturing activities, at the time you import the substance, or at the point you begin to process the substance.							
	"NAmixture"	Manufacture	Import	Process				
	Technical grade #1	% purity	% purity	% purity				
	Technical grade #2	% purity	% purity	% purity				
	Technical grade #3	% purity	% purity	% purity				
	¹ Major = Greatest quan	tity of listed substance	e manufactured, importe					
4.02	Submit your most recensubstance, and for ever	tly updated Material Sarry formulation containing	e manufactured, importe fety Data Sheet (MSDS) ng the listed substance ped by a different sour	for the listed If you possess				
4.02	Submit your most recensubstance, and for ever	tly updated Material Sarry formulation containing	e manufactured, importe fety Data Sheet (MSDS) ng the listed substance ped by a different sour	for the listed If you possess				
4.02	Submit your most recensubstance, and for ever an MSDS that you developersion. Indicate when appropriate response.	tly updated Material Sarry formulation containing	e manufactured, importer fety Data Sheet (MSDS) ng the listed substance ped by a different sour nas been submitted by o	for the listed If you possess ce, submit your circling the				
4.02	Submit your most recent substance, and for ever an MSDS that you developerate when appropriate response. Yes	tly updated Material Sarry formulation containing oped and an MSDS developed at least one MSDS in their at least one MSDS in the sarry of the sarry	fety Data Sheet (MSDS) ng the listed substance ped by a different sour nas been submitted by o	for the listed If you possess The submit your Controling the				
4.02	Submit your most recensubstance, and for ever an MSDS that you developeration. Indicate where appropriate response. Yes	tly updated Material Samuer ry formulation containing oped and an MSDS develop ther at least one MSDS i	fety Data Sheet (MSDS) ng the listed substance ped by a different sour nas been submitted by o	for the listed i. If you possess ice, submit your circling the				
4.02	Submit your most recensubstance, and for ever an MSDS that you developerate version. Indicate when appropriate response. Yes	tly updated Material Sarry formulation containing oped and an MSDS develop ther at least one MSDS i	fety Data Sheet (MSDS) ng the listed substance ped by a different soun has been submitted by o	for the listed If you possess ce, submit your circling the				

 $[\overline{\chi}\overline{\chi}]$ Mark (X) this box if you attach a continuation sheet.

MATERIAL SAFETY DATA SHEET

Mobay Corporation A Bayer USA INC. COMPANY



MOBAY CORPORATION Polyurethane Division Mobay Road Pittsburgh, PA 15205-9741

ISSUE DATE SUPERSEDES 3/21/88 9/14/87

TRANSPORTATION EMERGENCY: CALL CHEMTREC

TELEPHONE NO: 800-424-9300; DISTRICT OF COLUMBIA: 202-483-7616

DIVISION ADDRESS

MOBAY NON-TRANSPORTATION EMERGENCY NO.: (412) 923-1800

PRODUCT IDENTIFICATION

PRODUCT NAME....: Mondur TD-80 (All Grades)

PRODUCT CODE NUMBER....: E-002

CHEMICAL FAMILY....: Aromatic Isocyanate

CHEMICAL NAME....: Toluene Diisocyanate (TDI)

SYNONYMS....: Benzene, 1,3-diisocyanato methyl-

CAS NUMBER....: 26471-62-5 T.S.C.A. STATUS....: On Inventory

OSHA HAZARD COMMUNICATION

STATUS....: This product is hazardous under the criteria of

the Federal OSHA Hazard Communication Standard 29 CFR 1910.1200.

CHEMICAL FORMULA....: $C_0H_6N_2O_2$

II. HAZARDOUS INGREDIENTS

COMPONENTS: %: OSHA-PEL ACGIH-TLV

2,4-Toluene Diisocyanate (TDI) 80% 0.02 ppm 0.005 ppm TWA CAS# 584-84-9 Ceiling

0.02 ppm STEL

2,6-Toluene Diisocyanate (TDI) 20% Not Established Not Established CAS# 91-08-7

> III. PHYSICAL DATA

APPEARANCE....: Liquid

COLOR....: Water white to pale yellow

ODOR....: Sharp, pungent

ODOR THRESHOLD....: Greater than TLV of 0.005 ppm

MOLECULAR WEIGHT....: 174

MELT POINT/FREEZE POINT..: Approx. 55°F (13°C) Approx. 484°F (251°C) BOILING POINT....:

VAPOR PRESSURE....: Approx. 0.025 mmHg @ 77°F (25°C)

VAPOR DENSITY (AIR=1)....:

6.0

Not Applicable 1.22 @ 77°F (25°C) SPECIFIC GRAVITY....:

BULK DENSITY....: 10.18 lbs/gal

SOLUBILITY IN WATER....: Reacts slowly with water at normal room

temperature to liberate CO, gas.

% VOLATILE BY VOLUME....: Negligible

> Product Code: E-002 Page 1 of 8

MB 321 REV 10-86

IV. FIRE & EXPLOSION DATA

FLASH POINT OF(OC)...... 260°F (127°C) Pensky-Martens Closed Cup FLAMMABLE LIMITS -

Le1....: 0.9% 9.5%

EXTINGUISHING MEDIA....: Dry chemical (e.g. monaommonium phosphate, potassium sulfate, and potassium chloride), carbon dioxide, high expansion (proteinic) chemical foam, water spray for large fires. Caution: Reaction

between water or foam and hot TDI can be vigorous.

SPECIAL FIRE FIGHTING PROCEDURES/UNUSUAL FIRE OR EXPLOSION HAZARDS: Full emergency equipment with self-contained breathing apparatus and full protective clothing (such as rubber gloves, boots, bands around legs, arms and waist) should be worn by fire fighters. No skin surface should be exposed. During a fire, TDI vapors and other irritating, highly toxic gases may generated by thermal decomposition or combustion. (See Section VIII). A temperatures greater than 350°F (177°C) TDI forms carbodismides with the release of CO₂ which can cause pressure build-up in closed containers. Explosive rupture is possible. Therefore, use cold water to cool fire-exposed containers.

V. HUMAN HEALTH DATA

PRIMARY ROUTE(S) OF

Inhalation. Skin contact from liquid, vapors or aerosols.

EFFECTS AND SYMPTOMS OF OVEREXPOSURE INHALATION

Acute Exposure. TDI vapors or mist at concentrations above the TLV can irritate (burning sensation) the mucous membranes in the respiratory tract (nose, throat, lungs) causing runny nose, sore throat, coughing, chest discomfort, shortness of breath and reduced lung function (breathing obstruction). Persons with a preexisting, nonspecific bronchial hyperractivity can respond to concentrations below the TLV with similar symptoms as well as asthma attack. Exposure well above the TLV may lead to bronchitis, bronchial spasm and pulmonary edema (fluid in lungs). These effects are usually reversible. Chemical or hypersensitive pneumonitis, with flu-like symptoms (e.g., fever, chills), has also been reported. These symptoms can be delayed up to several hours after exposure.

Chronic Exposure. As a result of previous repeated overexposures or a single large dose, certain individuals may develop isocyanate sensitization (chemical asthma) which will cause them to react to a later exposure to isocyanate at levels well below the TLV. These symptoms, which can include chest tightness, wheezing, cough, shortness of breath or asthmatic attack, could be immediate or delayed up to several hours after exposure. Similar to many non-specific asthmatic responses, there are reports that once sensitized an individual can experience these symptoms upon exposure to dust, cold air or other irritants. This increased lung sensitivity can persist for weeks and in severe cases for several years. Chronic overexposure to isocyanate has also been reported to cause lung damage (including decrease in lung function) which may be permanent. Sensitization can either be temporary or permanent.

> Product Code: E-002 Page 2 of 8

V. HUMAN HEALTH DATA (Continued)

SKIN CONTACT

<u>Acute Exposure.</u> Isocyanates react with skin protein and moisture and can cause irritation which may include the following symptoms: reddening, swelling, rash, scaling or blistering. Cured material is difficult to remove.

Chronic Exposure. Prolonged contact can cause reddening, swelling, rash, scaling, blistering, and, in some cases, skin sensitization. Individuals who have developed a skin sensitization can develop these symptoms as a result of contact with very small amounts of liquid material or as a result of exposure to vapor.

EYE CONTACT

Acute Exposure. Liquid, aerosols or vapors are severely irritating and can cause pain, tearing, reddening and swelling. If left untreated, corneal damage can occur and injury is slow to heal. However, damage is usually reversible. See Section VI for treatment.

Chronic Exposure. Prolonged vapor contact may cause conjunctivitis.

INGESTION

Acute Exposure. Can result in irritation and corrosive action in the mouth, stomach tissue and digestive tract. Symptoms can include sore throat, abdominal pain, nausea, vomiting and diarrhea. Chronic Exposure. None found.

MEDICAL CONDITIONS

AGGRAVATED BY EXPOSURE..: Asthma, other respiratory disorders (bronchitis, emphysema, bronchial hyperractivity), skin allergies, eczema.

CARCINOGENICITY............ No carcinogenic activity was observed in lifetime inhalation studies in rats and mice (International Isocyanate Institute).

IARC...... IARC has announced that it will list TDI as a substance for which there is sufficient evidence for its carcinogenicity in experimental animals but inadequate evidence for the carcinogencity of TDI to humans (IARC Monograph 39).

OSHA..... Not listed.

EXPOSURE LIMITS

OSHA PEL...... 0.02 ppm Ceiling ACGIH TLV...... 0.005 ppm TWA/0.02 ppm STEL

VI. EMERGENCY & FIRST AID PROCEDURES

EYE CONTACT...... Flush with copious amounts of water, preferably lukewarm for at least 15 minutes holding eyelids open all the time. Refer individual to physician or an ophthalmologist for immediate follow-up.

Product Code: E-002 Page 3 of 8

VI. <u>EMERGENCY & FIRST AID PROCEDURE</u> (Continued)

SKIN CONTACT..... Remove contaminated clothing immediately. Wash affected areas thoroughly with soap and water for at least 15 minutes. Tincture of green soap and water is also effective in removing isocyanates. Wash contaminated clothing thoroughly before reuse. For severe exposures, get under safety shower after removing clothing, then get medical attention. For lesser exposures, seek medical attention if irritation develops or persists after the area is washed. INHALATION..... Move to an area free from risk of further exposure. Administer oxygen or artificial respiration as needed. Obtain medical attention. Asthmatic-type symptoms may develop and may be immediate or delayed up to several hours. Consult physician. INGESTION..... Do not induce vomiting. Give 1 to 2 cups of milk or water to drink. DO NOT GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON. Consult physician. NOTE TO PHYSICIAN...... Eyes. Stain for evidence of corneal injury. If cornea is burned, instill antibiotic steroid preparation frequently. Workplace vapors have produced reversible corneal epithelial edema impairing vision. Skin. This compound is a known skin sensitizer. Treat symptomatically as for contact dermatitis or thermal burns. Ingestion. Treat symptomatically. There is no specific antidote. Inducing vomiting is

symptomatically as for contact dermatitis or thermal burns. <u>Ingestion</u>. Treat symptomatically. There is no specific antidote. Inducing vomiting is contraindicated because of the irritating nature of this compound. <u>Respiratory</u>. This compound is a known pulmonary sensitizer. Treatment is essentially symptomatic. An individual having a skin or pulmonary sensitization reaction to this material should be removed from exposure to any isocvanate.

VII. <u>EMPLOYEE PROTECTION RECOMMENDATIONS</u>

EYE PROTECTION..... Liquid chemical goggles or full-face shield. Contact lenses should not be worn. If vapor exposure is causing irritation, use a full-face, air-supplied respirator. SKIN PROTECTION...... Chemical resistant gloves (butyl rubber, nitrile rubber, polyvinyl alcohol). However, please note that PVA degrades in water. Cover as much of the exposed skin area as possible with appropriate clothing. If skin creams are used, keep the area covered only by the cream to a minimum. RESPIRATORY PROTECTION....: An approved positive pressure air-supplied respirator is required whenever TDI concentrations are not known or exceed the Short-Term Exposure or Ceiling Limit of 0.02 ppm or exceed the 8-hour Time Weighted Average TLV of 0.005 ppm. An approved air-supplied respirator with full facepiece must also be worn during spray application, even if exhaust ventilation is used. For emergency and other conditions where the exposure limits may be greatly exceeded, use an approved, positive pressure self-contained breathing apparatus. TDI has poor warning properties since the odor at which TDI can be smelled is substantially higher than 0.02 ppm. Observe OSHA regulations for respirator use (29 CFR 1910.134).

> Product Code: E-002 Page 4 of 8

VII. EMPLOYEE PROTECTION RECOMMENDATIONS (Continued)

VENTILATION.....: Local exhaust should be used to maintain levels below the TLV whenever TDI is handled, processed, or spray-applied. At normal room temperatures (70°F) TDI levels quickly exceed the TLV unless properly ventilated. Standard reference sources regarding industrial ventilation (e.g., ACGIH Industrial Ventilation) should be consulted for guidance about adequate ventilation.

MONITORING.....: TDI exposure levels must be monitored by accepted monitoring techniques to ensure that the TLV is not exceeded. (Contact Mobay for guidance). See Volume 1 (Chapter 17) and Volume 3 (Chapter 3) in Patty's Industrial Hygiene and Toxicology for sampling strategy.

MEDICAL SURVEILLANCE.....: Medical supervision of all employees who handle or come in contact with TDI is recommended. These should include preemployment and periodic medical examinations with respiratory function tests (FEV, FVC as a minimum). Persons with asthmatic-type conditions, chronic bronchitis, other chronic respiratory diseases or recurrent skin eczema or sensitization should be excluded from working with TDI. Once a person is diagnosed as sensitized to TDI, no further exposure can be permitted.

OTHER..... Safety showers and eyewash stations should be available. • Educate and train employees in safe use of product. Follow all label instructions.

VIII. REACTIVITY DATA

STABILITY.....: Stable under normal conditions.

POLYMERIZATION....: May occur if in contact with moisture or other materials which react with isocyanates. Self-reaction may occur at temperatures over 350°F (177°C) or at lower temperatures if sufficient time is involved. See Section IV.

INCOMPATIBILITY

(MATERIALS TO AVOID)....: Water, amines, strong bases, alcohols. Will cause some corrosion to copper alloys and aluminum. Reacts with water to form heat, CO, and insoluble ureas. HAZARDOUS DECOMPOSITION

PRODUCTS...... By high heat and fire: carbon monoxide, oxides of nitrogen, traces of HCN, TDI vapors and mist.

IX. SPILL OR LEAK PROCEDURES

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED: Evacuate and ventilate spill area; dike spill to prevent entry into water system; wear full protective equipment, including respiratory equipment during clean-up. (See Section VII).

Major Spill: Call Mobay at 412/923-1800. If transportation spill, call CHEMTREC 800/424-9300. If temporary control of isocyanate vapor is required, a blanket of protein foam (available at most fire departments) may be placed over the spill. Large quantities may be pumped into closed, but not sealed, container for disposal.

Product Code: E-002 Page 5 of 8

IX. SPILL OR LEAK-PROCEDURES (Continued)

<u>Minor Spill:</u> Absorb isocyanate with sawdust or other absorbent, shovel into suitable unsealed containers, transport to well-ventilated area (outside) and treat with neutralizing solution: mixture of water (80%) with non-ionic surfactant Tergitol TMN-10 (20%), or; water (90%), concentrated ammonia (3-8%) and detergent (2%). Add about 10 parts or neutralizer per part of isocyanate, with mixing. Allow to stand uncovered for 48 hours to let CO₂ escape. Clean-up: Decontaminate floor with decontamination solution letting stand for at least 15 minutes.

CERCLA (SUPERFUND) REPORTABLE QUANTITY: 100 pounds for TDI

WASTE DISPOSAL METHOD....: Follow all federal, state or local regulations. TDI must be disposed of in a permitted incinerator or landfill. Incineration is the preferred method for liquids. Solids are usually incinerated or landfilled. Empty containers must be handled with care due to product residue. Decontaminate containers prior to disposal. Empty decontaminated containers should be crushed to prevent reuse. DO NOT HEAT OR CUT EMPTY CONTAINER WITH ELECTRIC OR GAS TORCH. (See Sections IV and VIII). Vapors and gases may be highly toxic.

X. SPECIAL PRECAUTIONS & STORAGE DATA

STORAGE TEMPERATURE

(MIN./MAX.)..... 70°F (21°C)/90°F (32°C)

AVERAGE SHELF LIFE..... 12 months

SPECIAL SENSITIVITY

(HEAT, LIGHT, MOISTURE).: If container is exposed to high heat, 375°F (177°C) it can be pressurized and possibly rupture. TDI reacts slowly with water to form polyureas and liberates CO₂ gas. This gas can cause sealed containers to expand and possibly rupture.

PRECAUTIONS TO BE TAKEN

IN HANDLING AND STORING.: Store in tightly closed containers to prevent moisture contamination. Do not reseal if contamination is suspected. Prevent all contact. Do not breathe the vapors. Warning properties (irritation of the eyes, nose and throat or odor) are not adequate to prevent chronic overexposure from inhalation. This material can produce asthmatic sensitization upon either single inhalation exposure to a relatively high concentration or upon repeated inhalation exposures to lower concentrations. Exposure to vapors of heated TDI can be extremely dangerous. Employee education and training in safe handling of this product are required under the OSHA Hazard Communication Standard.

Product Code: E-002 Page 6 of 8

XI. SHIPPING DATA

Toluene Diisocyanate D.O.T. SHIPPING NAME....: Toluene Diisocyanate TECHNICAL SHIPPING NAME...: D.O.T. HAZARD CLASS....: Poison B UN 2078 UN/NA NO....: 100 pounds PRODUCT RQ..... D.O.T. LABELS....: Poison D.O.T. PLACARDS....: Poison Toluene Diisocyanate FRT. CLASS BULK....: Chemicals, NOI (Toluene Diisocyante) NMFC 60000 FRT. CLASS PKG....: Mondur TD-80 Product Label PRODUCT LABEL....:

XII. ANIMAL TOXICITY DATA

diisocyanates may occur.

SUB-CHRONIC/CHRONIC TOXICITY: Sub-chronic and chronic animal studies show that the primary effects of inhaling vapors and/or aerosols of TDI are restricted to the pulmonary systems. Emphysema, pulmonary edema, pneumonitis and rhinitis are common pathologic effects. Extended exposures to as low as

0.1 ppm TDI have induces pulmonary inflammation.

OTHER
CARCINOGENICITY.....: The NTP conducted carcinogenesis studies of a commercial grade TDI using rats and mice in which the test material was diluted in corn oil and administered by gavage. The investigators concluded that TDI was carcinogenic in male and female rats (fibrosarcomas, pancreatic adenomas, neoplastic liver nodules and mammary gland fibrosarcomas) and female mice (hemangiosarcomas and hepatocellular adenomas). However, chronic inhalation studies in which rats and mice were exposed to 0.05 and 0.15 ppm TDI (10-30 times recommended TLV, 8-hr level) induced no treatment-related tumorigenic effects. In these studies, both exposure levels produced extensive irritation to the nasal passages and upper respiratory system of the test animals indicating that suitable effective exposures were administered.

Product Code: E-002

XII. ANIMAL TOXICITY DATA (Continued)

MUTAGENICITY..... TDI is positive in the Ames assay with activation. However, mammalian cell transformation assays using human lung cells and Syrian hamster kidney cells were negative, as were micronucleus tests using rats and mice.

in a servicio

AQUATIC TOXICITY..... LC₅₀ - 96 hr (static): 165 mg/liter (Fathead minnow)

The control of the legislation o

in the first of the second and the state of the second of ्र विकास । विकास का प्राप्त के किन्स्य के स्वतान के प्राप्त के प्राप्त के प्राप्त के प्राप्त के प्राप्त के प्र विकास के अपने विकास के अने के सम्बद्ध के अपने के प्राप्त के सम्बद्ध के अपने के प्राप्त के प्राप्त के प्राप्त क

The Company of the Co

Fig. 1823 Marie Company Compan

to be the Mary Market of the Control of

TARTED VILLE CONTRACTOR ASSESSMENT

A Property of the Control of the Con

LC₅₀ - 96 hr (static): Greater than 508 mg/liter (Grass shrimp)

LC₅₀ - 24 hr (static): Greater than 500 mg/liter (Daphnia magna)

XIII. APPROVALS

the contract of the contract o

Product Code: E-002 Page 8 of 8

4.03	Submit a copy or reasonable facsimile of any hazard information (other than an MSDS) that is provided to your customers/users regarding the listed substance or any formulation containing the listed substance. Indicate whether this information has been submitted by circling the appropriate response.
	Yes NOT APPLICABLE 1
	No 2
4.04	For each activity that uses the listed substance, circle all the applicable number(s) corresponding to each physical state of the listed substance during the activity listed. Physical states for importing and processing activities are determined at the time you import or begin to process the listed substance. Physical states for
<u>CBI</u>	the time you import or begin to process the listed substance. Physical states for manufacturing, storage, disposal and transport activities are determined using the final state of the product.
	N

	Physical State					
Activity	Solid	Slurry	Liquid	Liquified Gas	Gas	
Manufacture	1	2	3	4	5	
Import	1	2	3	4	5	
Process	1	2	3	4	5	
Store	1	2	3	4	5	
Dispose	1	2	3	4	5	
Transport	1	2	3	4	5	

[_]	Mark (X)	this	box if	you	attach	a	continuation	sheet.	

4.05 <u>CBI</u> [_]	followin percenta particle importin listed s	Size If the lister gractivities, indicating ge distribution of the sign size of the siz	te for each ap he listed subs meter. Measur ivities at the he physical st	plicable tance by e the ph time yo ate and	e physical vactivity nysical st ou import particle	l state /. Do r tate and or begi sizes f	the size not include land inclu	and the le sizes for cess the acturing
	Physical State	NOT APPLICABLE	Manufacture	Import	Process	Store	Dispose	Transport
	Dust	<1 micron				-		
		1 to <5 microns						
		5 to <10 microns					***************************************	
	Powder	• <1 micron						
		1 to <5 microns						
		5 to <10 microns						
	Fiber	<1 micron			-			
		1 to <5 microns	****		Free 			
		5 to <10 microns						
	Aerosol	<1 micron	-					
		1 to <5 microns						
		5 to <10 microns					,	
	Mark (X)	this box if you attac	ch a continuat	ion shee	et.			

SECTION	5	ENVIRONMENTAL FATE
ODOITON	_	DUATIONIEMINE LAID

5.01 I	ndicate the rate constants for the following tr	angformation number	(2)
a		ansformation processes.	
-	Absorption spectrum coefficient (peak)	(1/M a=) a+	
	Reaction quantum yield, 6		
b	Direct photolysis rate constant, k _p , at Oxidation constants at 25°C:	17111	1at1tude
_	For ¹ 0 ₂ (singlet oxygen), k _{ox}		1 /W 1
c.	For RO ₂ (peroxy radical), k _{ox}		
d.	2025		mg/1
	For bacterial transformation in water, k_b		1 / h
	Specify culture		
e.			
			1/W L
	For acid-promoted process, k		
	For neutral process, k		
f.	For neutral process, k _N		
	Chemical reduction rate (specify conditions)	Λ.	
g.	Other (such as spontaneous degradation)		
6.			

5.02	a.	Specify the half-life of	of the listed sub	stance in the followi	ng media.
		Med1a		Half-life (speci	fy units)
		Groundwater			
		Atmosphere			
		Surface water			
		Soil			
	b.	Identify the listed sub life greater than 24 ho	stance's known t urs.	ransformation product	s that have a half-
		CAS [®] No.	Name	Half-life (specify units)	Media
				(opecity units)	in
					in
					in
					in
5.03	Sno	oify the estance water a			
3.03		cify the octanol-water pathod of calculation or det			
5.04	Spec	cify the soil-water parti	ition coefficient	, K _d	at 25°(
	Soil	l type	• • • • • • • • • • • • • • • • • • • •		
5.05	Spec	cify the organic carbon-w	ater partition	•••••	at 25°0
5.06	Spec	rify the Henry's Law Cons		• • • • • • • • • • • • • • • • • • • •	•

Bioconcentration Factor	<u>Species</u>	<u>Test¹</u>
UNKNOWN .	UNKNOWN	UNKNOWN
¹ Use the following codes to	o designate the type of test:	
<pre>F = Flowthrough S = Static</pre>		
•		
		,

1		Quantity Sold or	Total Sales
Market		Transferred (kg/yr)	Value (\$/yr)
Retail sales		/	
Distribution	- Wholesalers		
Distribution	- Retailers		
Intra-company t	transfer		
Repackagers			
Mixture produce	ers		
Article produce	ers		
Other chemical or processors	manufacturers		
Exporters		٧	
Other (specify)			
/			

feasible substit	substance and state tute is one which is operation, and which	ercially feasible substitute the cost of each substitute s economically and technolog ch results in a final produc	A commercially
feasible substitution your current	substance and state tute is one which is operation, and which	the cost of each substitute S economically and technolog	A commercially
feasible substitution your current	tute is one which is operation, and which its end uses.	the cost of each substitute S economically and technolog	A commercially gically feasible to the state of the st
feasible substitution your current	tute is one which is operation, and which its end uses. Substitute	the cost of each substitute S economically and technolog	c. A commercially gically feasible to the comparable of the comparable of the control of the con
feasible substitution your current	tute is one which is operation, and which its end uses. Substitute	the cost of each substitute S economically and technolog	c. A commercially gically feasible to the comparable of the comparable of the control of the con
feasible substitution your current	tute is one which is operation, and which its end uses. Substitute	the cost of each substitute S economically and technolog	c. A commercially gically feasible to the comparable of the comparable of the control of the con
feasible substitution your current	tute is one which is operation, and which its end uses. Substitute	the cost of each substitute S economically and technolog	c. A commercially gically feasible to the comparable of the comparable of the control of the con

SECTION 7 MANUFACTURING AND PROCESSING INFORMATION

General Instructions:


For questions 7.04-7.06, provide a separate response for each process block flow diagram provided in questions 7.01, 7.02, and 7.03. Identify the process type from which the information is extracted.

PART A MANUFACTURING AND PROCESSING PROCESS TYPE DESCRIPTION

7.01 In accordance with the instructions, provide a process block flow diagram showing the major (greatest volume) process type involving the listed substance.

CBI

TDI-POLYOLS ADDITION POLYMERIZATION

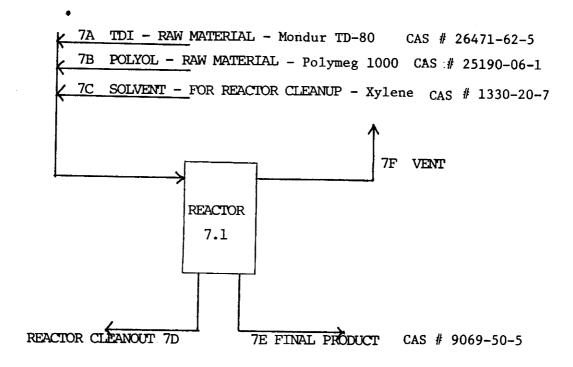

 $[\ \]$ Mark (X) this box if you attach a continuation sheet.

7.03	process emission streams and emission points that contain the listed substance and which, if combined, would total at least 90 percent of all facility emissions if no treated before emission into the environment. If all such emissions are released from one process type, provide a process block flow diagram using the instructions for question 7.01. If all such emissions are released from more than one process type, provide a process block flow diagram showing each process type as a separate block.						
CBI							
[_]	Process type	_					
	(NOT APPLICABLE)						
	•						
<u></u>	ark (X) this box if you attach a continuation sheet.	-					

Unit peration ID Jumber 7.1	Typical EquipmentTypeREACTOR	Operating Temperature Range (°C) 60°-95°C	Operating Pressure Range (mm Hg)	Vessel Composition
eration ID umber	Equipment Type	Temperature Range (°C)	Pressure Range (mm Hg)	
7.1	REACTOR	60° - 95° C	2 simouris and -	
			2 atmospheric pressure	SS
••••••••••••••••••••••••••••••••••••••				
		k (X) this box if you attach a con		

. 05	process prock i	process stream identified in your flow diagram is provided for more omplete it separately for each pro	than one process type	iagram(s). If e, photocopy th
<u> 31</u>			•	
_]	Process type	TDI-POLYOLS ADDITION 1	POLYMERIZATION	
	Process Stream ID Code	Process Stream _Description	Physical State ¹	Stream _Flow (kg/yı
	7A	TDI-RAW MATERIALS	OL	NA NA
	7B	POLYOLS RAW MATERIALS	OL.	N/A
	7C	SOLVENT FOR REACTOR CLEANUP	OL.	NA.
	7D	REACTOR CLEANOUT	SY	NA
	7E	FINAL PRODUCT	OL.	NA
	7F	VENT	GU	NA
	GC = Gas (conde GU = Gas (uncor SO = Solid SY = Sludge or AL = Aqueous li OL = Organic li	quid	pressure) nd pressure)	

į,

instruction Process typ a. Process	on and complete it sepa s for further explanati e <u>TDI-POLYOI</u> b.	on and an example	≘.)	(Refer to the					
a. Process		LS ADDITION POLYM							
Process	b .	Process type TDI-POLYOLS ADDITION POLYMERIZATION							
		c.	d.	e.					
Stream ID Code	Known Compounds ¹	Concen- trations ^{2,3} (% or ppm)	Other Expected Compounds	Estimated Concentrations (% or ppm)					
7A	TDI	99.99 EW	N/A	NA					
		. 10							
7B	* POLYOL	99.99 EW	N/A	NA.					
7C	SOLVENT	99.99 EW	NĄ	NA					
		<u> </u>							
ontinued be	low								
_	7B 7C ontinued be	7B POLYOL 7C SOLVENT ontinued below	7C SOLVENT 99.99 EW ontinued below	7B POLYOL 99.99 EW NA 7C SOLVENT 99.99 EW NA					

7.06	If a process block flow diagram is provided for more than one process type, photocol							
CBI		this question and complete it separately for each process type. (Refer to the instructions for further explanation and an example.)						
[_]	Process type TDI-POLYOLS ADDITION POLYMERIZATION							
	a.	b.	c.	d.	e.			
	Process Stream ID Code	Known Compounds ¹	Concentrations ^{2,3} (% or ppm)	Other Expected Compounds	Estimated Concentrations (% or ppm)			
		SOLVENT	95.00 EW	NA	NA			
		TDI-POLYOL PREPOLYMER	5.00 EW	NA	NA .			
	7E	TDI-POLYOL PREPOLYMER	99.80 EW	NA	NA			
	<u>7</u> F	AIR	99.99 EW	N/A	NA			
7.06	continued b	elow						
					·			
	Mark (X) thi	is box if you attach a cor	ntinuation sheet	· ·				

7.06	(continued)
------	-------------

¹For each additive package introduced into a process stream, specify the compounds that are present in each additive package, and the concentration of each component. Assign an additive package number to each additive package and list this number in column b. (Refer to the instructions for further explanation and an example. Refer to the glossary for the definition of additive package.)

Additive <u>Package Number</u>	Components of Additive Package	Concentration (% or ppm)
1	NOT APPLICABLE	NOT APPLICABLE
2		
•		
3		

4		
·		


5		
2		
	to designate how the concentrat	ion was determined:
A = Analytical result E = Engineering judgemen	t/calculation	
	to designate how the concentrat	ion was measured:
V = Volume W = Weight	5	

PART A RESIDUAL TREATMENT PROCESS DESCRIPTION

8.01 In accordance with the instructions, provide a residual treatment block flow diagram which describes the treatment process used for residuals identified in question 7.01.

CBI

____ Process type ____ TDI-POLYOLS ADDITION POLYMERIZATION

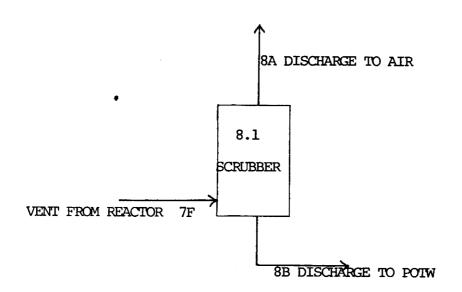

8.05 CBI	process	n(s). II a : s type, photo	residual trea ocopy this qu	itment block f estion and co	in your residu low diagram is mplete it sepa r explanation	provided for	more than one		
[_]		type. (Refer to the instructions for further explanation and an example.) Process type NOT APPLICABLE							
	a.	b.	c.	d.	е.	f.	g.		
	Stream ID Code	Type of Hazardous - Waste	Physical State of Residual ²	Known Compounds ³	Concentra- tions (% or ppm) ^{4,5,6}	Other Expected Compounds	Estimated Concen- trations (% or ppm)		
		·							
		77				******			
				7.100					
-									
r				-					
8.05	continue	d below							

8.05 (continued)

¹Use the following codes to designate the type of hazardous waste:

I = Ignitable

C = Corrosive

R = Reactive

E = EP toxic

T = Toxic

H = Acutely hazardous

²Use the following codes to designate the physical state of the residual:

GC = Gas (condensible at ambient temperature and pressure)

GU = Gas (uncondensible at ambient temperature and pressure)

SO = Solid

SY = Sludge or slurry

AL = Aqueous liquid

OL = Organic liquid

IL = Immiscible liquid (specify phases, e.g., 90% water, 10% toluene)

8.05 continued below

8.05 (continued)	NOT APPLICABLE	

³For each additive package introduced into a process stream, specify the compounds that are present in each additive package, and the concentration of each component. Assign an additive package number to each additive package and list this number in column d. (Refer to the instructions for further explanation and an example. Refer to the glossary for the definition of additive package.)

	Additive <u>Package Number</u>	Components of Additive Package	Concentrations (% or ppm)
	1		
	2		
	•		
	3		
	4		
	5		
	4Hee the fellowing and		
		es to designate how the concentration w	as determined:
	A = Analytical result E = Engineering judge	ment/calculation	
8.05	continued below		·
[_]	Mark (X) this box if y	ou attach a continuation sheet.	

Suse the following codes to designate how the concentration was measured V = Volume V = Weight Specify the analytical test methods used and their detection limits in below. Assign a code to each test method used and list those codes in Code Method 1 2 3 4 5 6	the table
W = Weight 6 Specify the analytical test methods used and their detection limits in below. Assign a code to each test method used and list those codes in Code Method 1 2 3 4 5	column e. tection Lim
De Code Method 1 2 3 4 5	column e. tection Lim
Code Method 1	
2 3 4 5	· /
3 4 5	
3 4 5	
5	
6	

:

8.06	diagram process	erize each p (s). If a r type, photo (Refer to th	esidual treaccopy this qu	atment block sestion and o	flow diag complete	gram is pro it separate	vided for mo	ore than one
<u>CBI</u>		-						
[_]	Process	type	<u>TDI-P</u>	OLYOLS ADDIT	ION POLYM	ERIZATION		
	a.	b.	c.	d.	•	e.	f. Costs for	g.
	Stream ID Code	Waste Description Code	Management Method Code ²	Residual Quantities (kg/yr)	of Resi	agement idual (%) Off-Site	Off-Site Management (per kg)	Changes in Management Methods
	8B	B15	<u>M1</u>	NA	NA	NA	NA	NONE
		•						
		B60	1FB	1	0	100%	\$1,000	None
				And the second s				
· 	¹ Use the ² Use the	codes provi	ded in Exhit	oit 8-1 to de	esignate t	the waste d	escriptions	
1	Mark (X)	this box if	you attach	a continuati	on sheet.			

[_]	NOT APPLICABLE	- Ch	oustion namber nture (°C)	Temp	tion of erature nitor	In Cor	ence Time mbustion (seconds)
	Incinerator	Primary	Secondary	Primary	Secondary	Primary	Secondary
	1	XXXX	XXXX	xxxx	xxxx	XXXX	XXXX
	2		2			***************************************	
	3						
	Yes	ing the app		onse.	s been submit	• • • • • • • • • • • • • • • • • • • •	1
8.23 CBI	Complete the fo are used on-sit treatment block	e to burn	tne residuals	nree largest identified	t (by capacity in your proce	y) incineratess block or	residual
	Incinerator 1		Air Pol Control	llution Device ¹		Emission Avail	s Data
	2						
	by circli	ng the appr	opriate respo	nse.	been submitt	•	-
	No	• • • • • • • • • • •	••••••	••••••	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	2
	Use the following S = Scrubber (in E = Electrostate 0 = Other (spec	ing codes t include typ ic precipi	o designate t	he air poll			·

PART A EMPLOYMENT AND POTENTIAL EXPOSURE PROFILE

9.01 Mark (X) the appropriate column to indicate whether your company maintains records on the following data elements for hourly and salaried workers. Specify for each data element the year in which you began maintaining records and the number of years the records for that data element are maintained. (Refer to the instructions for further explanation and an example.)


<u>Data Element</u>	Mata are Ma Hourly Workers	intained for Salaried Workers	Year in Which Data Collection Began	Number of Years Records Are Maintained
Date of hire	<u>X</u>		1946 continuous	42
Age at hire	X	<u>x</u>	1946	42
Work history of individual before employment at your facility	x	X .	1946	42
Sex •	<u> </u>	X	1946	42
Race	X	X	1946	42
Job titles	X	x	1946	42
Start date for each job title	<u> </u>	X	1972	16
End date for each job title	X	X	1972	16
Work area industrial hygiene monitoring data	X	NA	1987	2
Personal employee monitoring data	<u> </u>	X	1977	11
Employee medical history	X	X	1977	11
Employee smoking history	X	X	1977	11
Accident history	<u> </u>	<u> </u>	1972	16
Retirement date	<u> </u>	X	1946 continuous	42
Termination date	<u> </u>	<u> </u>	1946 continuous	42
Vital status of retirees	N	N	NA	NA
Cause of death data	<u> </u>	N	<u>NA</u>	<u>NA</u>

[_]	Mark (X)	this box	if you attach	a continuation	sheet.		

[_]	a	b.	_	3	
			c. Yearly	d. Total	e. Total
	Activity	Process Category	Quantity (kg)	Workers	Worker-Hour
	Manufacture of the listed substance	Enclosed	N/A	_N/A	N/A
		Controlled Release	N/A	_N/A	N/A
		0pen	N/A	N/A	N/A
	On-site use as reactant	Enclosed	1654 Kg	4	168 hr.
		Controlled Release	N/A	_N/A	N/A
	•	0pen	N/A	N/A	N/A
	On-site use as nonreactant	Enclosed	N/A	_N/A	N/A
		Controlled Release	N/A	_N/A	N/A
		0pen	N/A	_N/A	N/A
	On-site preparation of products	Enclosed	N/A	N/A	N/A
	oz products	Controlled Release	N/A	N/A	N/A
		0pen	N/A	N/A	N/A

_	rovide a descriptive j ncompasses workers who isted substance.	job title for each labor category at your facility that one may potentially come in contact with or be exposed to the
[_]		
<u>La</u>	bor Category	Descriptive Job Title
	A	KETTLE OPERATORS
	В	PRODUCTION MANAGERS
	С	
	D	
	E	
	F	
	G •	
	H	
	I	
	J	

9.04	In accordance with the indicate associated wo	e instructions, ork areas.	provide	your	process	block	flow	diagram(s)	and
<u>CBI</u>									
[-]	Process type	Tht_Dot vot car	מ אמדידתו	OT WATE	DIGADION				

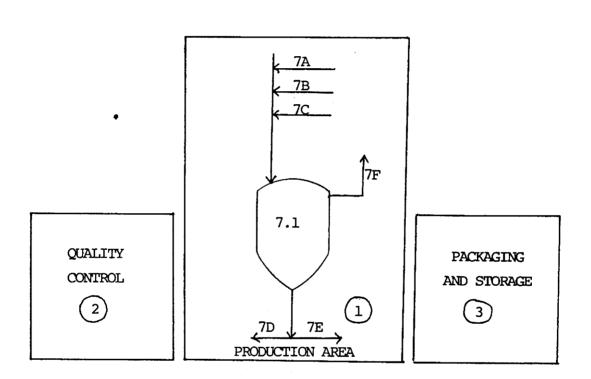

9.05 CBI	additional areas not	work area(s) shown in question 9.04 that encompass workers who in contact with or be exposed to the listed substance. Add any shown in the process block flow diagram in question 7.01 or a question and complete it separately for each process type.
	Process type	TDI-POLYOLS ADDITION POLYMERIZATION
	Work Area ID	
		Description of Work Areas and Worker Activities
	1	REACTOR AREA, PRODUCTION
	2	QUALITY CONTROL, QUALITY CONTROL ANALYSIS
	3	PACKAGING & STORAGE, PACKAGING OF FINAL PRODUCT
	4	
	5	
	6 •	
	7	
	8	
	9	
	10	
		\cdot

<u>CBI</u>			for each process DI-POLYOLS ADDITIO			
			• • • • • • • • • • • • • • • • • • • •		**·	
	Labor Category	Number of Workers Exposed	Mode of Exposure (e.g., direct skin contact)	Physical State of Listed Substance	Average Length of Exposure Per Day ²	Number of Days per Year Exposed
	A	4	INHALATION	OL	В	14/yr.
	B	1	INHALATION	OL	A	14/yr.
		•				W.64
			·	_		
	GC = Gas (contemporary temporary tem	condensible at rature and presuncondensible a rature and presults fumes, vapo	sure) All tambient Ol sure; Il rs, etc.)	<pre>% = Sludge or slut L = Aqueous liquit L = Organic liquit L = Immiscible lit (specify phase 90% water, 100 L = length of expose</pre>	urry id id iquid ses, e.g., 0% toluene) sure per day:	
	B = Greater exceedin C = Greater	than 15 minute of 16ss than 15 minute of 1 hour than one hour, of 2 hours	s, but not E but not	= Greater than 2 exceeding 4 ho = Greater than 4 exceeding 8 ho = Greater than 8	ours hours, but nours	

<u>CBI</u>	Photocopy this que area.	(TWA) exposure levels and the 15-miestion and complete it separately f	nute peak exposure levels. or each process type and work
[_]	Process type	TDI-POLYOLS ADDITION POLYMERI	ZATION
	Work area	<u>1</u>	
	Labor Category	8-hour TWA Exposure Level (ppm, mg/m ³ , other-specify)	15-Minute Peak Exposure Leve (ppm, mg/m³, other-specify)
	A	0.0007 ppm	UK
	<u>B</u>	UK	UK
		-	
	-		
	•		
·		f you attach a continuation sheet.	

80,

Test l breathing work area mples e patches amples amples tory samples tests	Work Area ID	Testing Frequency (per year)	Number of Samples (per test)	Who Samples B B	Analyzed In-House (Y/N) N	Number o Years Reco Maintaine
l breathing work area mples e patches amples amples amples tory samples	Area ID	Frequency (per year)	Samples (per test)	Samples ¹	In-House (Y/N)	Years Reco Maintaine
work area mples e patches amples amples tory samples	1					
mples e patches amples amples tory samples				B	<u>N</u>	2
e patches amples amples tory samples						
amples amples tory samples						
amples tory samples						
tory samples			•			
•						
tests						
specify)				-		
specify)				F 9-20-2-		
pecify)			***************************************			
following co	odes to de	signate who	takes the r	nonitoring	samples:	
nt industria	l hygienis					
1	following cont industrial urance carried consultant	following codes to dent industrial hygienis urance carrier	following codes to designate who nt industrial hygienist urance carrier A consultant	following codes to designate who takes the results industrial hygienist urance carrier	following codes to designate who takes the monitoring nt industrial hygienist urance carrier A consultant	following codes to designate who takes the monitoring samples: nt industrial hygienist urance carrier A consultant

	analytical methodology u		-		
ıı	Sample Type		ampling and Analyti		
	PERSONAL BREATHING ZONE	GLASS IMPI	INGERS WITH ISOCYAN	ATE COLLECTIN	G AGENT/L.C.
	GENERAL WORK AREA	GLASS IMPINGE	ERS WITH ISOCYANATE	COLLECTING A	GENT/L.C.
		PALS			
				7.00	
9.10 CBI	If you conduct personal a specify the following in	and/or ambient formation for e	air monitoring for each equipment type	the listed sused.	ubstance,
	Equipment Type Det	tection Limit ²	Manufacturer	Averaging Time (hr)	Model Number
	NA*	NA*	NA*	NA*	NA*
	And here			_	

	¹ Use the following codes	to designate a			
	¹ Use the following codes A = Passive dosimeter	to designate po	ersonal air monitor	ing equipmen	t types:
	<pre>B = Detector tube C = Charcoal filtration D = Other (specify)</pre>	tube with pump			
	Use the following codes	to designate ar	mbient air monitori	ng equipment	types:
	E = Stationary monitors F = Stationary monitors	located within	work area		
	G = Stationary monitors	located at plar	it boundary		
	<pre>H = Mobile monitoring equ I = Other (specify)</pre>				
	² Use the following codes	to designate de	etection limit unit	s:	
	A = ppm B = Fibers/cubic centime	ter (f/cc)			
	<pre>C = Micrograms/cubic mete * = MONITORED BY INSURANCE</pre>	er (µ/m³)			
	THOUSANCE OF THOUSANCE	.L OMMILIN			
$\overline{1}$	Mark (X) this box if you a	attach a contin	uation shoot	- 100	
	mark (A) this box if you a	ictach a contin	uation sneet.		

NOT	APPLICABLE			Frequency
	Test Description		(weekly, mo	nthly, yearly, et
	- Part I and the Market I		<u> </u>	
		•		
	•			
			•	

Describe the engineering co to the listed substance. P process type and work area.	hotocopy this	u use to reduce o question and comp	r eliminate wor lete it separa	rker expos tely for e
Process type	· TDI-POLYO	LS ADDITION POLYMI	ERIZATION	
Work area	• • • • • • • • • • • • • • •	•••••	1	
Engineering Controls	Used (Y/N)	Year Installed	Upgraded (Y/N)	Year Upgrad
Ventilation:		•		
Local exhaust	Y	1988	Y	1988
General dilution	Y	1988	Y	1988
Other (specffy)				
Vessel emission controls	Y	1988	Y	1988
Mechanical loading or packaging equipment	N		N	
Other (specify)				

9.13 CBI	Describe all equipment or process modifications you have prior to the reporting year that have resulted in a reduc the listed substance. For each equipment or process modi the percentage reduction in exposure that resulted. Phot complete it separately for each process type and work are	tion of worker exposure t fication described, state occupy this question and
	Process type TDI-POLYOLS ADDITION POLYMERIZATI	ON
	Work area	1
	Equipment or Process Modification	Reduction in Worker Exposure Per Year (%)
	TDI IS CHARGED TO THE KETTLE BY VACUUM INSTEAD OF	50% (Est.)
	GRAVITY FEED FROM DRUM.	

.14 3I	TH GACH MOLK BLGS	IN OFGER to reduce or eliminat	ipment that your workers wear or use their exposure to the listed it separately for each process t
	Process type	····TDI-POLYOLS ADDITION POL	YMERIZATION
		• • • • • • • • • • • • • • • • • • • •	
			Wear or Use
		Equipment Types	<u>(Y/N)</u>
		Respirators	<u>Y</u>
	•	Safety goggles/glasses	Y
		Face shields	N
		Coveralls	Y
		Bib aprons	N
		Chemical-resistant gloves	Y
		Other (specify)	

9.15	process respirat	ers use respirators when w type, the work areas wher tors used, the average usa and the type and frequence it separately for each p	e the respirating, whether or the first	tors are us	sed, the type	of
CBI		•				
[_]	Process	type TDI-POLYO	LS ADDITION PO	LYMERIZATI	ON	
	Work Area	Respirator Type	Average Usage	Fit Tested (Y/N)	Type of Fit Test	Frequency of Fit Tests (per year)
	_1	ORGANIC VAPOR	E	<u> </u>	QL	D
	_2	ORGANIC VAPOR	E	<u> </u>	QL	D
	3	ORGANIC VAPOR	E	<u> </u>	QL	D

		*				
	² Use the QL = Qua QT = Qua	thly	ate the type o	of fit tes	NDLED.	

<u>CBI</u>	eliminate worker exposure authorized workers, mark monitoring practices, pro	e to the listed s areas with warni wide worker trai	ubstance (e.g ng signs, ins ning programs	., restrict e ure worker de . etc.). Pho	ntrance only to tection and tocopy this					
[_]		Process type TDI-POLYOLS ADDITION POLYMERIZATION								
	Work area	•••••••	• • • • • • • • • • • • •	1						
	RESPIRATOR PROTECTION									
	PLACARDING				Weight to a gap at					
	LIMIT ACCESS		,							
	TRAINING PROGRAM, CHAN	GING ROOMS AND L	AUNDRY SERVICI	2						

.20	Indicate (X) how often you leaks or spills of the lisseparately for each process rype NOT	sted substance. ss type and work	Photocopy thi	ask used to cl is question ar	lean up routine nd complete it					
	Work area									
			••••							
	Work area		1-2 Times Per Day	3-4 Times Per Day	clean up routine and complete it					
	Work area	Less Than	1-2 Times							
	Work area NOT APPLICABLE Housekeeping Tasks	Less Than	1-2 Times							
	Work area NOT APPLICABLE Housekeeping Tasks Sweeping	Less Than	1-2 Times							
	Work area	Less Than	1-2 Times							
	Work area NOT APPLICABLE Housekeeping Tasks Sweeping Vacuuming Water flushing of floors	Less Than	1-2 Times							
	Work area NOT APPLICABLE Housekeeping Tasks Sweeping Vacuuming Water flushing of floors	Less Than	1-2 Times							
	Work area NOT APPLICABLE Housekeeping Tasks Sweeping Vacuuming Water flushing of floors	Less Than	COMS AND LAUNDRY SERVICE orm each housekeeping task used to clean up routing the stance. Photocopy this question and complete it and work area. CABLE css Than 1-2 Times 3-4 Times More Than							
	Work area NOT APPLICABLE Housekeeping Tasks Sweeping Vacuuming Water flushing of floors	Less Than	1-2 Times							

9.21	Do you have a written medical action plan for responding to routine or emergency expesure to the listed substance?
	Routine exposure NOT APPLICABLE
	Yes
	No 2
	Emergency exposure NOT APPLICABLE
	Yes 1
	No 2
	If yes, where are copies of the plan maintained?
	Routine exposure:
	Emergency exposure:
_	
9.22	Do you have a written leak and spill cleanup plan that addresses the listed substance? Circle the appropriate response.
	Yes
	No 2
	MAIN OFFICE AREA
	If yes, where are copies of the plan maintained? MANUFACTURING AREA
	Has this plan been coordinated with state or local government response organizations? Circle the appropriate response.
	Yes
	No 2
9.23	Who is responsible for monitoring worker safety at your facility? Circle the appropriate response.
	Plant safety specialist
	Insurance carrier 2
	OSHA consultant 3
	Other (specify)
	Mark (X) this box if you attach a continuation sheet.

SECTION 10 ENVIRONMENTAL RELEASE

General Instructions:

Complete Part E (questions 10.23-10.35) for each non-routine release involving the listed substance that occurred during the reporting year. Report on all releases that are equal to or greater than the listed substance's reportable quantity value, RQ, unless the release is federally permitted as defined in 42 U.S.C. 9601, or is specifically excluded under the definition of release as defined in 40 CFR 302.3(22). Reportable quantities are codified in 40 CFR Part 302. If the listed substance is not a hazardous substance under the Comprehensive Environmental Response, Compensation, and Liability Act of 1980 (CERCLA) and, thus, does not have an RQ, then report releases that exceed 2,270 kg. If such a substance however, is designated as a CERCLA hazardous substance, then report those releases that are equal to or greater than the RQ. The facility may have answered these questions or similar questions under the Agency's Accidental Release Information Program and may already have this information readily available. Assign a number to each release and use this number throughout this part to identify the release. Releases over more than a 24-hour period are not single releases, i.e., the release of a chemical substance equal to or greater than an RQ must be reported as a separate release for each 24-hour period the release exceeds the RQ.

For questions 10.25-10.35, answer the questions for each release identified in question 10.23. Photocopy these questions and complete them separately for each release.

10.01	Where is your facility located? Circle all appropriate responses.
<u>CBI</u>	
[_]	Industrial area
	Urban area
	Residential area
	Agricultural area
	Rural area
	Adjacent to a park or a recreational area
	Within 1 mile of a navigable waterway
	Within 1 mile of a school, university, hospital, or nursing home facility
	Within 1 mile of a non-navigable waterway
	Other (specify)1

10.02	Specify the exact location of you is located) in terms of latitude (UTM) coordinates.	r facility (from cen and longitude or Uni	tral poi versal l	int where Tansverse	process unit Mercader
	Latitude	NORTH	34	<u>° 81</u>	
	Longitude	WEST	118	° 16	<u>' 15</u>
	UTM coordinates Zone	, North:	ing	, East	ing
10.03	If you monitor meteorological conthe following information.	ditions in the vicini	ity of y	our facili	ty, provide
	Average annual precipitation	•••••			inches/yea
	Predominant wind direction				_ `
	•	>			_
10.04	Indicate the depth to groundwater	below your facility.			
	Depth to groundwater	-			
	September 6.				meters
10.05 <u>CBI</u>	For each on-site activity listed, listed substance to the environment Y, N, and NA.)	it. (Refer to the in	structi	ons for a	s of the definition o
[_]	On-Site Activity	Envi Air		al Release ter	Land
	Manufacturing	N/A	N,		N/A
	Importing	N/A			N/A
	Processing	N	1		N
	Otherwise used	N/A	N,		N/A
	Product or residual storage	N/A	N,		N/A
	Disposal	N/A	N	_	N/A
	Transport	N/A	N/	/A	N/A
					•
	fark (X) this box if you attach a co	ontinuation short			
· • • • • • • • • • • • • • • • • • •	(, c box II you actach a co	Jucingation Sueet.			

	Provide the following information for the liste of precision for each item. (Refer to the inst an example.)	d substance and sp ructions for furth	ecify the level er explanation and
CBI			
[_]	Quantity discharged to the air	LESS THAN 1	kg/yr ± 50
	Quantity discharged in wastewaters	NONE	kg/yr ±
	Quantity managed as other waste in on-site treatment, storage, or disposal units		kg/yr <u>+</u>
	Quantity managed as other waste in off-site treatment, storage, or disposal units		kg/yr +
	•		
•			
	· ·		

10.08 CBI	for each process str process block or res	technologies used to minimize release of eam containing the listed substance as if idual treatment block flow diagram(s). rately for each process type.	dentified in your
[_]			
f1	riocess type	TDI-POLYOLS ADDITION POLYMERIZATION	
	Stream ID Code	Control Technology	Percent Efficiency
	7A	LOCAL EXHAUST/WATER SCRUBBER	>50%
	•		
		-	
] Ma	ark (X) this box if yo	ou attach a continuation sheet.	

10.09 <u>CBI</u> [_]	substance in to residual treatm source. Do not	erms of a Stre ment block flo t include raw equipment lea	dentify each emission point source containing the lister am ID Code as identified in your process block or ow diagram(s), and provide a description of each point material and product storage vents, or fugitive emissimaks). Photocopy this question and complete it separate
	Process type	<u>TDI-</u>	POLYOLS ADDITION POLYMERIZATION
. I	Point Source ID Code		Description of Emission Point Source
	7A		DURING CHANGING PROCESS IN REACTOR
_			
_			
	•.		
_			
			
_			
_			
_			

114

Point Source ID Code	Physical State	Average Emissions (kg/day)	Frequency ² (days/yr)	Duration ³ (min/day)	Average Emission Factor	Maximum Emission Rate (kg/min)	Maximum Emission Rate Frequency (events/yr)	Max Emi R Dura (min
<u>7A</u>	_ <u>G</u>	<u>UK</u>	14/yr	15/day	N A	NA.	NA	N
								
								-
								-
							_	
	, v = vapor	, 1 = ran(100	ignate physical late; A = Aero	osol; 0 = 0 the	point of re	lease:		

10.11 <u>CBI</u>	Stack Parameters Identify the stack parameters for each Point Source ID Code identified in question 10.09 by completing the following table. NOT APPLICABLE									
[_]	Point Source ID Code	Stack Height(m)	Stack Inner Diameter (at outlet) (m)	Exhaust Temperature (°C)	Emission Exit Velocity (m/sec)	Building Height(m)	Building Width(m) ²	Vent Type ³		
										
							•			
	· · · · · · · · · · · · · · · · · · ·						•			
			-					···-··		
							-			
							-			

				-						

	² Width of	attached of collowing contal	or adjacent r adjacent b							

10.12 CBI	If the listed substance is emitted in partic distribution for each Point Source ID Code in Photocopy this question and complete it separate.	dentified in question 10.09.
-	NOT APPLICABLE	
[_]	Point source ID code	• • • • • • • • • • • • • • • • • • • •
	Size Range (microns)	Mass Fraction (% ± % precision)
	< 1	the free state of the free sta
	≥ 1 to < 10	
	≥ 10 to < 30	
	≥ 30 to < 50	
	≥ 50 to < 100	
	≥ 100 to < 500	
	≥ 500	
		Total = 100%
		•

PART C	FUGITIVE EMISSIONS									
10.13 <u>CBI</u>	types listed which are expractording to the specified the component. Do this for residual treatment block finot exposed to the listed sprocess, give an overall presposed to the listed substor each process type.	weight percer each proced to the weight percentage of tance.	listed suent of the ss type is). Do not this interest of this interest of the second s	bstance a le listed dentified ot includ s a batch	and which substance l in your le equipme l or inter	are in se passing process t nt types mittently	ervice through block or that are operated			
()	Process type NOT A			-						
	Percentage of time per year that the listed substance is exposed to this process type									
		Number	of Compo	nents in	Service by	y Weight cess Stre	Percent			
	Equipment Type	Less than 5%					Greater			
	Pump seals ¹	111111 3/8	3-10%	11-23%	26-75%	76-99%	than 99			
	Packed									
	Mechanical									
	Double mechanical ²			***						
	Compressor seals ¹					**********				
	Flanges									
	Valves				-	4				
	Gas ³									
	Liquid		****		-					
	Pressure relief devices ⁴ (Gas or vapor only)									
:	Sample connections									
	Gas									
	Liquid									
(Open-ended lines ⁵ (e.g., purge, vent)						-			
	Gas		_							
	Liquid									

10.13 continued on next page

[_]	Mark	(X)	this	box	if	you	attach	а	continuation	sheet.
-----	------	-----	------	-----	----	-----	--------	---	--------------	--------

¹List the number of pump and compressor seals, rather than the number of pumps or compressors

*If double mechanical seals are operated with the barrier (B) fluid at a pressure greater than the pump stuffing box pressure and/or equipped with a sensor (S) will detect failure of the seal system, the barrier fluid system, or both, ind with a "B" and/or an "S", respectively *Conditions existing in the valve during normal operation *Report all pressure relief devices in service, including those equipped with control devices *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operation operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operations *Lines closed during normal operation that would be used during maintenance operation to indicate which pre	10.13	(continued)		•							
*Report all pressure relief devices in service, including those equipped with control devices *Lines closed during normal operation that would be used during maintenance operations 10.14 Pressure Relief Devices with Controls — Complete the following table for those pressure relief devices identified in 10.13 to indicate which pressure relief devices in service are controlled. If a pressure relief device is not controlled enter "None" under column c. a.		will detect failure of t	he seal system, the	and/or equipped wi	th a concor (C) that						
*Report all pressure relief devices in service, including those equipped with control devices *Lines closed during normal operation that would be used during maintenance operations 10.14 Pressure Relief Devices with Controls — Complete the following table for those pressure relief devices identified in 10.13 to indicate which pressure relief devices in service are controlled. If a pressure relief device is not controlled enter "None" under column c. A.		³ Conditions existing in the valve during normal operation									
10.14 Pressure Relief Devices with Controls — Complete the following table for those pressure relief devices identified in 10.13 to indicate which pressure relief devices in service are controlled. If a pressure relief device is not controlled enter "None" under column c. A.		⁴ Report all pressure reli			equipped with						
pressure relief devices identified in 10.13 to indicate which pressure relief devices in service are controlled. If a pressure relief device is not controlled enter "None" under column c.		⁵ Lines closed during normal operations	al operation that wou	ıld be used during	maintenance						
Number of Pressure Relief Devices in Vessel Control Device Control Efficie NOT APPLICABLE Refer to the table in question 10.13 and record the percent range given under the heading entitled "Number of Components in Service by Weight Percent of Listed Substance" (e.g., <5%, 5-10%, 11-25%, etc.) The EPA assigns a control efficiency of 100 percent for equipment leaks controlle with rupture discs under normal operating conditions. The EPA assigns a control efficiency of 98 percent for emissions routed to a flare under normal operating conditions		pressure relief devices in devices in service are con	dentified in 10.13 to ntrolled. If a press) indicate which n	receure relief						
**Refer to the table in question 10.13 and record the percent range given under the heading entitled "Number of Components in Service by Weight Percent of Listed Substance" (e.g., <5%, 5-10%, 11-25%, etc.) **The EPA assigns a control efficiency of 100 percent for equipment leaks controlle with rupture discs under normal operating conditions. The EPA assigns a control efficiency of 98 percent for emissions routed to a flare under normal operating conditions		Number of	Percent Chemical	c.	- -						
¹ Refer to the table in question 10.13 and record the percent range given under the heading entitled "Number of Components in Service by Weight Percent of Listed Substance" (e.g., <5%, 5-10%, 11-25%, etc.) ² The EPA assigns a control efficiency of 100 percent for equipment leaks controlled with rupture discs under normal operating conditions. The EPA assigns a control efficiency of 98 percent for emissions routed to a flare under normal operating conditions			in Vessel ¹	Control Device	Control Efficiency ²						
Substance" (e.g., <5%, 5-10%, 11-25%, etc.) The EPA assigns a control efficiency of 100 percent for equipment leaks controlle with rupture discs under normal operating conditions. The EPA assigns a control efficiency of 98 percent for emissions routed to a flare under normal operating conditions		NOT APPLICABLE			-						
Substance" (e.g., <5%, 5-10%, 11-25%, etc.) The EPA assigns a control efficiency of 100 percent for equipment leaks controlle with rupture discs under normal operating conditions. The EPA assigns a control efficiency of 98 percent for emissions routed to a flare under normal operating conditions											
Substance" (e.g., <5%, 5-10%, 11-25%, etc.) The EPA assigns a control efficiency of 100 percent for equipment leaks controlle with rupture discs under normal operating conditions. The EPA assigns a control efficiency of 98 percent for emissions routed to a flare under normal operating conditions											
Substance" (e.g., <5%, 5-10%, 11-25%, etc.) The EPA assigns a control efficiency of 100 percent for equipment leaks controlle with rupture discs under normal operating conditions. The EPA assigns a control efficiency of 98 percent for emissions routed to a flare under normal operating conditions											
Substance" (e.g., <5%, 5-10%, 11-25%, etc.) The EPA assigns a control efficiency of 100 percent for equipment leaks controlle with rupture discs under normal operating conditions. The EPA assigns a control efficiency of 98 percent for emissions routed to a flare under normal operating conditions											
Substance" (e.g., <5%, 5-10%, 11-25%, etc.) The EPA assigns a control efficiency of 100 percent for equipment leaks controlle with rupture discs under normal operating conditions. The EPA assigns a control efficiency of 98 percent for emissions routed to a flare under normal operating conditions											
Substance" (e.g., <5%, 5-10%, 11-25%, etc.) The EPA assigns a control efficiency of 100 percent for equipment leaks controlle with rupture discs under normal operating conditions. The EPA assigns a control efficiency of 98 percent for emissions routed to a flare under normal operating conditions											
Substance" (e.g., <5%, 5-10%, 11-25%, etc.) The EPA assigns a control efficiency of 100 percent for equipment leaks controlle with rupture discs under normal operating conditions. The EPA assigns a control efficiency of 98 percent for emissions routed to a flare under normal operating conditions				-							
Substance" (e.g., <5%, 5-10%, 11-25%, etc.) The EPA assigns a control efficiency of 100 percent for equipment leaks controlle with rupture discs under normal operating conditions. The EPA assigns a control efficiency of 98 percent for emissions routed to a flare under normal operating conditions			-								
conditions	2	Substance" (e.g., <5%, 5-10) The EPA assigns a control of with rupture discs under no	of components in Servi 0%, 11-25%, etc.) efficiency of 100 per prmal operating condi	ce by Weight Perc cent for equipmen	ent of Listed t leaks controlled						
[_] Mark (X) this box if you attach a continuation sheet.		erriciency or as beccent to	or emissions routed t	o a flare under n	ormal operating						
	[<u></u>] M	ark (X) this box if you att	tach a continuation s	heet.							

10.15	Equipment Leak Detect place, complete the procedures. Photocotype.	IOILOWING table re	garding the	tah deal as	eation and -	
CBI	NOT APPLICABLE					
[_]	Process type	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	NO?	C APPLICABLE	
	Equipment Type	Leak Detection Concentration (ppm or mg/m³) Measured at Inches from Source	Detection Device			Repairs Completed (days afte initiated)
	Pump seals					
	Packed					
	Mechanical					
	Double mechanical					
	Compressor seals					-
	Flanges					
	Valves					
	Gas					
	Liquid					
	Pressure relief devices (gas or vapor only)					
	Sample connections					
	Gas					
	 Liquid		 .			
i	Open-ended lines			······································		
	Gas					
	Liquid					
:	Use the following coordinate POVA = Portable organists FPM = Fixed point more 0 = Other (specify)	nic vapor analyzer	etection de	vice:		

10.23	Indicate the date and time when the release occurred and when the release cer	ased or
	was stopped. If there were more than six releases, attach a continuation she list all releases.	eet and

NOT APPLICABLE Release	Date Started	Time (am/pm)	Date Stopped	Time (am/pm)
1	NOT APPLICABLE			
2				
3				
4				
5				····
6				<u> </u>

10.24	Specify	the	weather	conditions	at	the	time	of	each	release
-------	---------	-----	---------	------------	----	-----	------	----	------	---------

Release	Wind Speed (km/hr)	Wind Direction	Humidity (%)	Temperature (°C)	Precipitation (Y/N)
2			*************		
3					
4					
5				-	
6					
				_	

APPENDIX	I:	List	of	Continuation	Sheets

Attach continuation sheets for sections of this form and optional information after this page. In column 1, clearly identify the continuation sheet by listing the question number to which it relates. In column 2, enter the inclusive page numbers of the continuation sheet for each question number.

Question Number (1)	Continuation Sheet Page Numbers(2)
4.02	25A to 25H
7.06	47A
•	
	<u> </u>
The Mark (V) all the second se	
Mark (X) this box if you attach a continuation sheet.	